

AD 580

Doosan
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$' z' \$z' D:

	"	kw	"	kw	Amp
400/230	580,00	464,00	525,00	420,00	758,00

fPQDE

GC,) &

,) & z

fDF DE

%\$1

% %&

GC" \$(*"

z&("

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D; A Ž 5J F

TRANSFER SWITCH

AD 580

Doosan
Mecc Alte
D+' &''

1

Manufacturer		Doosan		
Model		DP158LD		
		510,00 kw [683,00HP]		
	L	14,618		
	"	128 x 142		
		15,0:1		
	fl # 7	"# "	1500	
	fl 7	L	22,00	
		L	90,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	33,10		
	' # "	700,00		
	' # "	98,00		
	° C	591,00		
		24 V d.c.		
	Load	%\$i	'+) i) \$i
	# "	115,10	83,40	55,10

2

		Mecc Alte		
		ECO 40-1L/4		
	Hz	50		
	"	550,00		
7cg'		0,80		
		3		
	fl 7	400/230		
	A	794,00		


3

		fl 7		fl 7	
	"	"	"	"	L
AD 580		3106,00	1550,00	1994,00	700,00
		fl 7		fl 7	
	"	"	"	"	L
MS 70	4200	4460	1606	2477	700

AD 580

Doosan
Mecc Alte
D+' &'

1 D+' &'

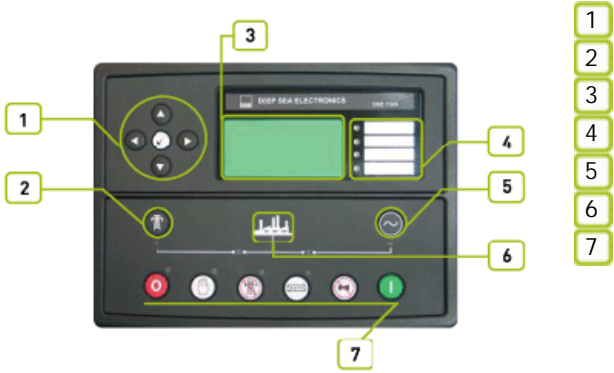

2

8G9ž + &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ ž f)

8G9+' &\$ ž 8G9+' &\$

% &1 *(žFG &žFG(,) ž

AD 580

Doosan
Mecc Alte
D+' &'

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

)
&(\$)

ž

ž

ž

ž

%, !&*(

"

"

"

"

"

"

"


"

"

"

AD 580

Doosan
Mecc Alte
D+ &''

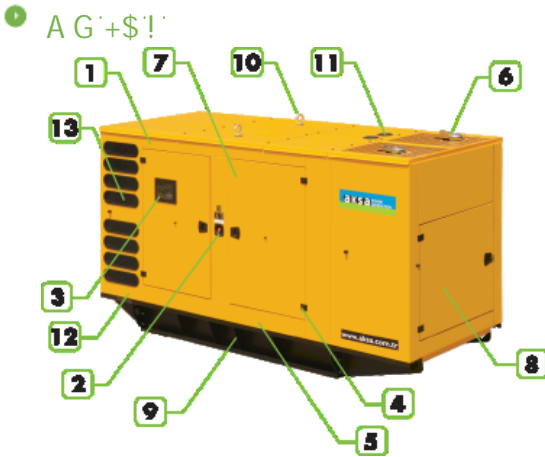

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4460
fl "L	"	2477
	L	700